




# Sonar Ranging Module

## Electronic Circuit Diagram


SRM400

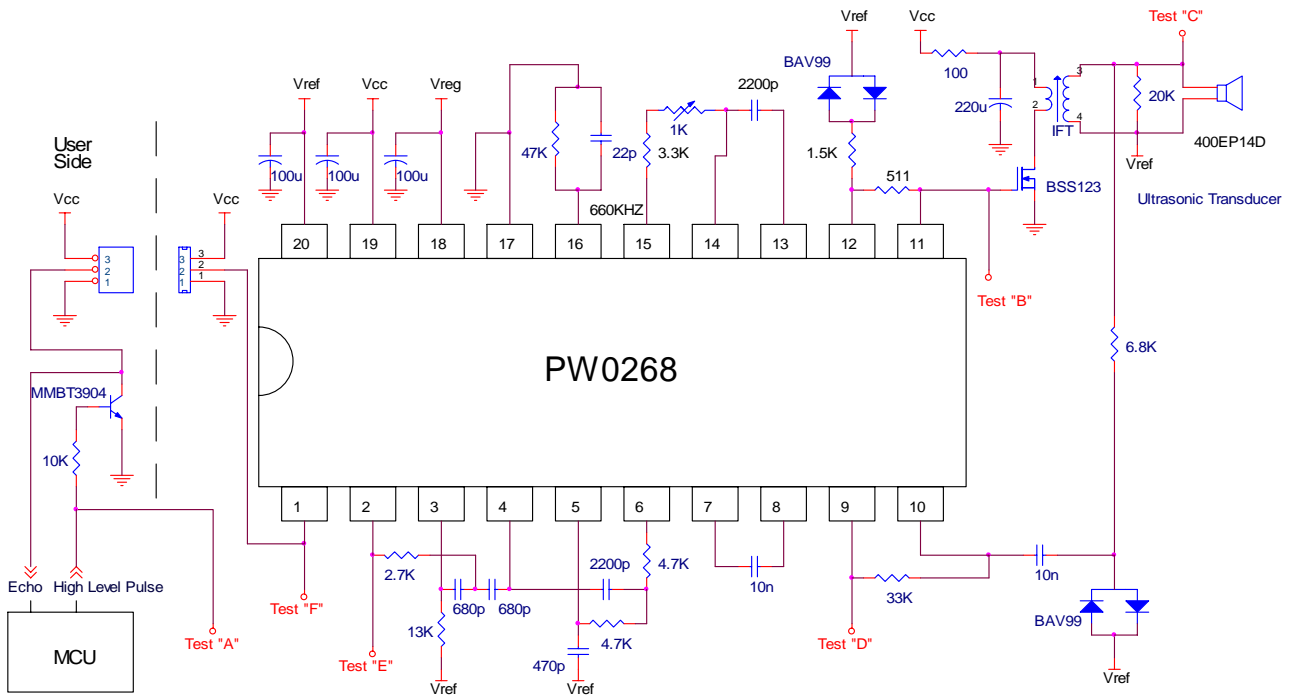


### Waveforms at different test points:

works with transducer model 400EP14D against a hard target of size of 20cmL\*20cmW\*1cmT at distance of 50cm


**“A” Point:** Control Pulse (from MCU)

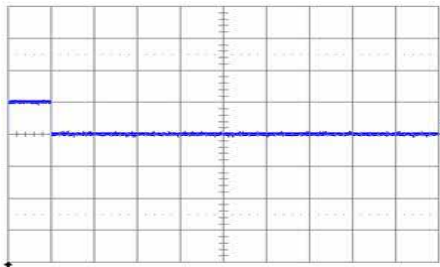


**“B” Point:** Tone bursts Signal

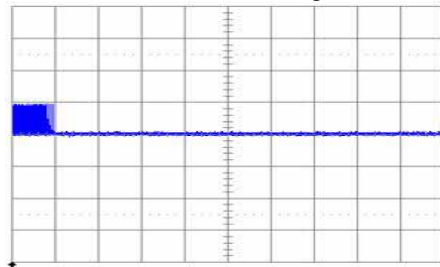


**“C” Point:** Transducer loading

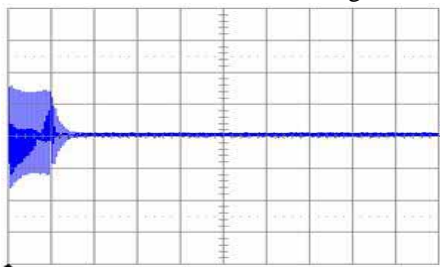


**“D” Point:** 1<sup>st</sup> Pre-Amplifier

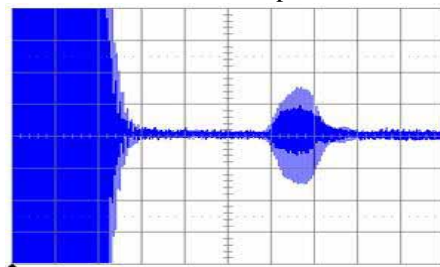

**“E” Point:** Main 32 Steps TCG Amplifier

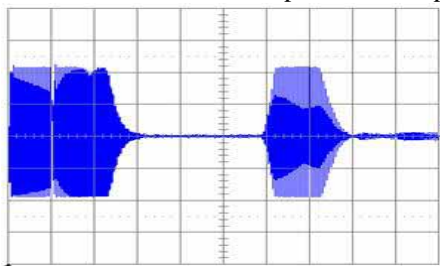


**“F” Point:** Digital Echo signal Output

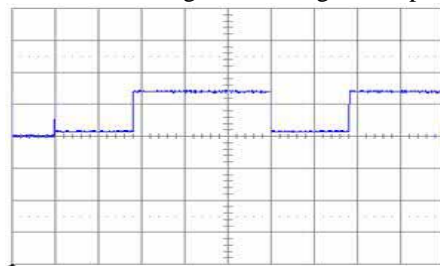

Refer to [PW-0268 Sonar Ranging IC](#) for detail information.

# Quartz Crystals & Matching Transformers


## Miniature Tuning Fork Quartz Crystals

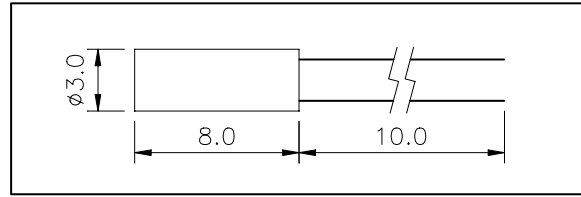

## Specification

Model Number	Nominal Frequency Hz	Tolerance at 25°C PPM	Temperature Stability -10°C to +70°C PPM	Load Capacitance pF	Series Resistance Ohm	Shunt Capacitance pF	Drive Level mW
S40000	40,000	± 60	± 45	12.5	35,000	2.3	0.001
S32768	32,768	± 20	± 30	12.5	35,000	2.3	0.001

## Matching Transformers

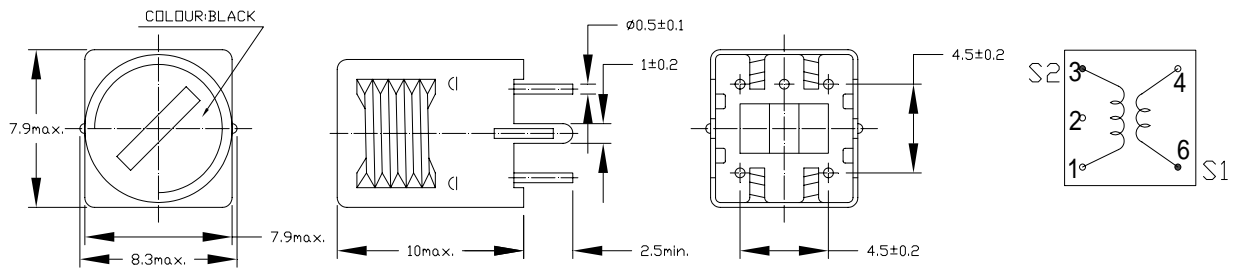

## Specification

Parts Number	K4000001	K4000002	K4000003	K4000004
Operating Frequency	40.0 KHz	40.0 KHz	40.0 KHz	40.0 KHz
Variable Inductance (min.)	10.6 mH± 6%	10.6 mH± 6%	10.6 mH± 6%	10.6 mH± 6%
Unloaded Q (min.)	70	100	25	47
Turn Ratio	1:10	1:10	1:10	1:10
Matching Transducer	400EP14D	400EP14D (Temperature Compensated Type)	235SR130	400EP18A